


DJM 型键联接单型弹性膜片联轴器

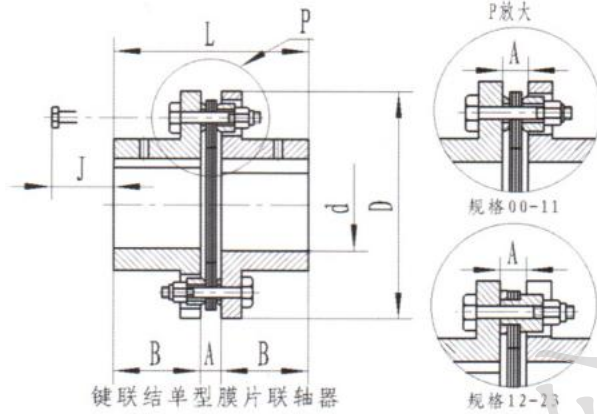

DJM 型键联接单型弹性膜片联轴器基本参数和主要尺寸

规格	公称扭矩 N·m	许用转速 rpm	重量 kg	转动惯量 kg·cm ²	d mm	D mm	A mm	B mm	L mm	J mm	许用补偿量	
											轴向 mm	角向
00	9.8	20000	0.14	1.74	3-20	57	4.9	20	44.9	10	±0.8	1°
01	33	20000	0.6	8	5-22	68	6.1	26	58.1	13	±0.8	1°
02	90	20000	1.1	24	6-32	81	6.6	26	58.6	16	±1.0	1°
03	173	18000	1.7	48	8-35	93	8.4	29	66.4	22	±1.1	1°
04	245	15000	2.5	80	10-42	104	11.2	34	79.2	20	±1.4	1°
05	420	13000	4.3	224	15-50	126	11.7	42	95.7	25	±1.6	45'
06	772	12000	6.9	440	20-60	143	11.7	48	107.7	28	±1.8	45'
07	1270	10000	11.3	1080	25-75	168	16.8	58	132.8	23	±2.0	45'
08	2080	10000	16.7	2080	30-82	194	17.0	64	145	30	±2.2	45'
09	3328	9000	22.7	3520	30-95	214	21.6	77	175.6	22	±2.4	45'
10	4900	8000	35.4	7200	40-108	246	23.9	89	201.9	23	±2.6	45'
11	6368	8000	52.0	12800	52-118	260	27.2	102	231.1	40	±2.8	45'
12	8900	6300	57.2	14400	60-110	276	17.5	128	273.5		±1.8	45'
13	15280	5000	77.3	22200	60-135	308	19.0	160	339		±2.0	30'
14	25410	4700	123	40800	60-155	346	21.5	182	385.5		±2.0	30'
15	37130	4300	156	64800	60-165	375	24.0	198	420		±2.0	30'
16	47120	3900	191	100200	70-180	410	29.5	214	457.5		±2.2	30'
17	57000	3500	245	15000	70-190	445	29.5	225	479.5		±2.2	30'
18	63186	3500	329	186600	80-205	470	31.0	248	527		±2.4	30'
19	82590	3200	394	288000	90-230	512	32.0	278	588		±2.4	30'
20	102100	2800	530	448200	90-255	556	32.5	305	642.5		±2.5	30'
21	126070	2450	619	609600	100-265	588	34.0	318	670		±2.7	30'
22	146350	2150	683	831600	100-275	630	34.0	332	698.5		±2.8	30'
23	173830	2000	791	1070400	100-290	655	35.5	348	731.5		±3.0	30'