
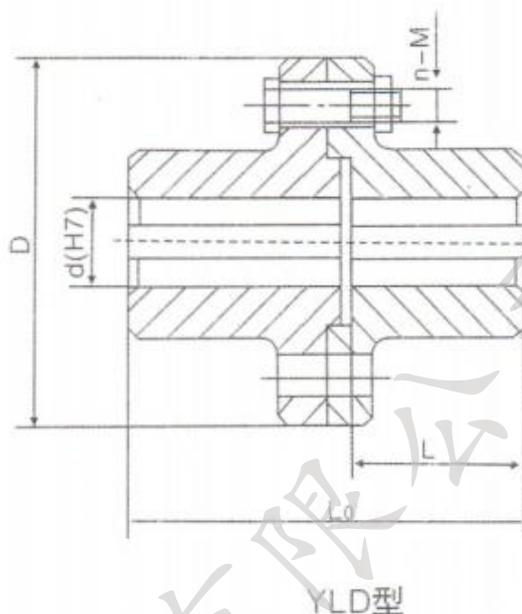


YL、 YLD 型凸缘联轴器 (GB/T3852-1997)

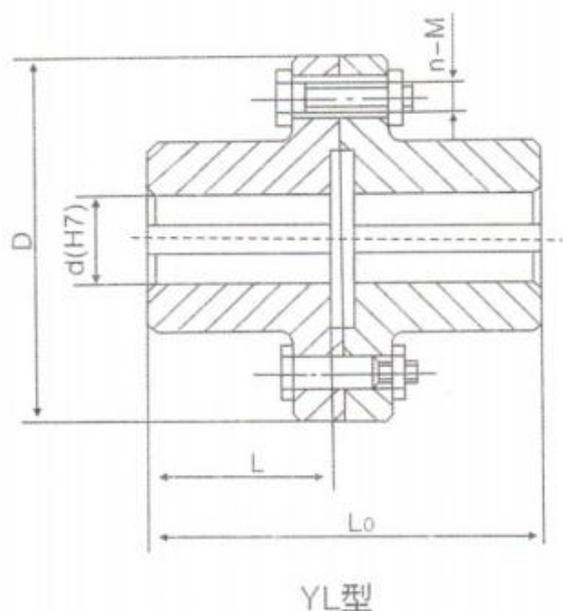

YL YLD 型凸缘联轴器基本参数和主要尺寸

型号 Type	公称 转矩 Tn N·m	许用转速 [n] r/min		轴孔直径 d (H7)		轴孔长度 L		D	螺栓		Lo		重量 Kg	转动惯量 kg·m ²
		铁	钢	铁	钢	Y型	J, J1型		数量 n	直径 M	Y型	J, J1型		
YL1. YLD1	10	8100	13000	10-20	10-22	25-52	22-38	71	3 (3)	M6	54-108	48-80	0.94	0.0018
YL2. YLD2	16	7200	12000	12-20	12-22	32-52	27-38	80	4 (4)	M6	68-108	58-80	1.50	0.0035
YL3. YLD3	25	6400	10000	14-22	14-25	32-62	27-44	90	3 (3)	M8	68-128	58-92	1.99	0.0069
YL4. YLD4	40	5700	9500	18-25	18-28	42-62	24-44	100	3 (3)	M8	88-128	64-92	2.47	0.0093
YL5. YLD5	63	5500	9000	22-30	22-32	52-82	38-60	105	4 (4)	M8	108-168	80-124	3.19	0.013
YL6. YLD6	100	5200	8000	24-32	24-35	52-82	38-60	110	4 (4)	M8	108-168	80-124	3.99	0.017
YL7. YLD7	160	4800	7600	28-38	28-40	62-112	44-82	120	4 (3)	M10	128-228	92-172	5.66	0.029
YL8. YLD8	250	4300	7000	32-42	32-45	82-112	60-84	130	4 (3)	M10	169-229	125-173	7.29	0.043
YL9. YLD9	400	4100	6800	38-48	38-48	82-112	60-84	140	6 (3)	M10	169-229	125-173	9.53	0.064
YL10. YLD10	630	3600	6000	45-55	45-60	112-142	84-107	160	6 (4)	M12	229-289	173-219	12.45	0.112
YL11. YLD11	1000	3200	5300	50-65	50-70	112-142	84-107	180	8 (4)		229-289	173-219	17.97	0.205
YL12. YLD12	1600	2900	4700	60-75	60-80	142-172	107-132	200	12 (6)	M12	289-349	219-269	30.62	0.463
YL13. YLD13	2500	2600	4300	70-85	70-85	142	107	220	8 (6)	M16	289-349	219-269	35.58	0.646
YL14. YLD14	4000	2300	4800	80-100	80-110	172-212	132-167	250	12 (8)	M16	350-430	270-340	57.13	1.353
YL15. YLD15	6300	2000	3400	100-120	90-125	72-212	132-167	290	12 (6)	M20	350-430	270-340	89.59	2.845
YL16. YLD16	10000	1800	3000	120-130	100-140	212-252	167-202	340	12 (6)	M24	430-510	340-410	119.57	5.271
YL17. YLD17	14000	1600	2600	130-150	110-160	212-302	167-242	380	12 (6)	M24	430-610	340-490	171.71	9.139
YL18. YLD18	20000	1400	2300		140-180	252-302	202-242	420	12 (6)	M30	510-610	410-490	263.83	17.883