


SWC WH 型（无伸缩焊接型）整体叉头十字轴式
万向联轴器（JB/T 5513-1991）

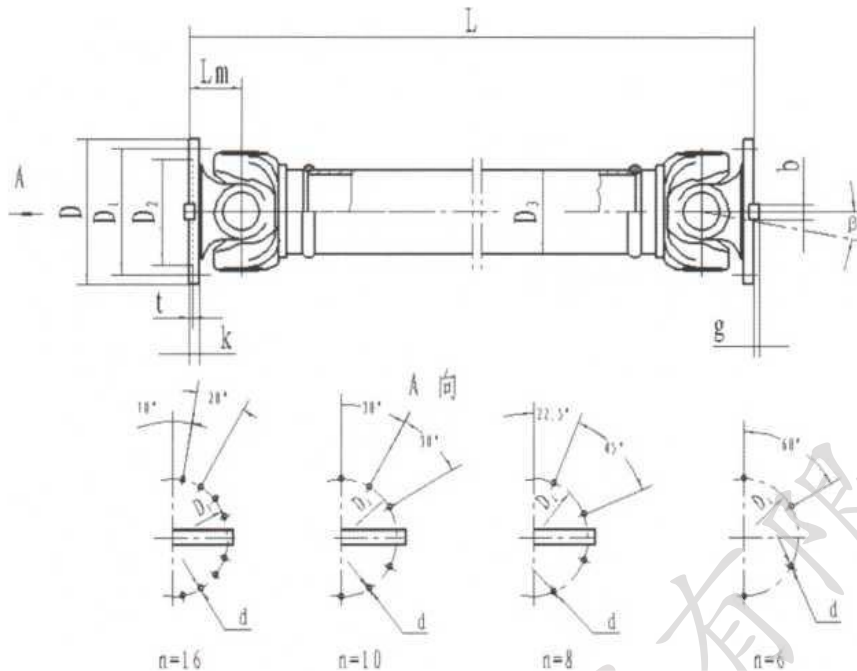

SWC WH 型（无伸缩焊接型）
整体叉头十字轴式万向联轴器基本参数和主要尺寸（JB/T 5513-1991）

型号	回转直径 Dmm	额定转矩 Tn kN•m	疲劳转矩 TfkN•m	轴线折角 (°)	尺寸 mm										转动惯量 kg·m ²		质量 kg	
					Lmin	D1js11	D2 H7	D3	Lm	n-d	k	t	Bh9	9	Lmin	增长 100mm	Lmin	增长 100mm
SWC100WH	100	1.25	0.63	≤25	243	84	57	60	55	6-9	7	2.5	-	-	0.0039	0.00019	4.5	0.35
SWC120WH	120	2.5	1.25	≤25	307	102	75	70	65	8-11	8	2.5	-	-	0.0096	0.00044	7.7	0.55
SWC150WH	150	5	2.5	≤25	350	130	90	89	80	8-13	10	3	-	-	0.0371	0.00157	18	0.85
SWC180WH	180	12.5	6.3	≤25	480	155	105	114	110	8-17	17	5	-	-	0.1500	0.00700	48	2.8
SWC225WH	225	40	20	≤15	520	196	135	152	120	8-17	20	5	32	9.0	0.3650	0.0234	78	4.9
SWC250WH	250	63	31.5	≤15	620	218	150	168	140	8-19	25	6	40	12.5	0.8470	0.0277	124	5.3
SWC285WH	285	90	45	≤15	720	245	170	194	160	8-21	27	7	40	15.0	1.7560	0.0510	185	6.3
SWC315WH	315	125	63	≤15	805	280	185	219	180	10-23	32	8	40	15.0	2.8930	0.0795	262	8.0
SWC350WH	350	180	90	≤15	875	310	210	267	194	10-23	35	8	50	16.0	5.0130	0.2219	374	15.0
SWC390WH	390	250	125	≤15	955	345	235	267	215	10-25	40	8	70	18.0	8.4060	0.2219	506	15.0
SWC440WH	440	355	180	≤15	1155	390	255	325	260	16-28	42	10	80	20.0	15.790	0.4744	790	21.7
SWC490WH	490	500	250	≤15	1205	435	275	325	270	16-31	47	12	90	22.5	26.540	0.4744	1014	21.7
SWC550WH	550	710	355	≤15	1355	492	320	426	305	16-31	50	12	100	22.5	48.320	1.3570	1526	34.0