


SWC DH 型（短伸缩焊接型）整体叉头十字轴式 万向联轴器（JB/T 5513-1991）

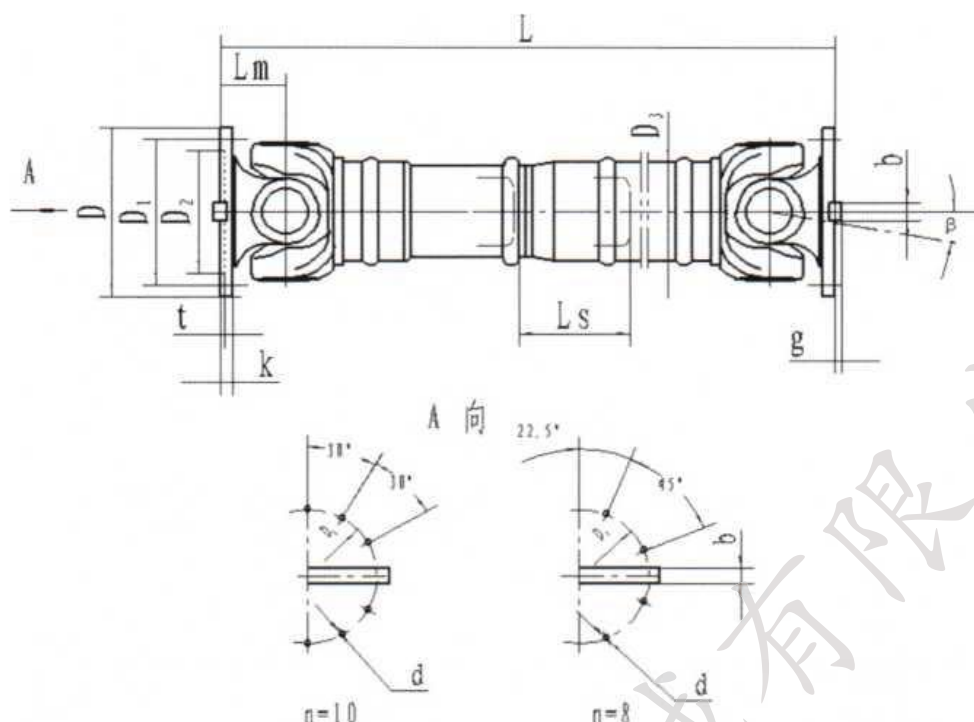

SWC DH 型（短伸缩焊接型）

整体叉头十字轴式万向联轴器基本参数和主要尺寸（JB/T 5513-1991）

型号	回转直径 D mm	额定转矩 Tn kN·m	疲劳 转矩 Tf kN ·m	轴线 折角 B C	伸缩 量 Ls mm	尺寸 (mm)											转动惯量 Kg·m ²		质量 kg	
						Lmin	D1 js11	D2 H7	D3	Lm	n-d	k	t	b h9	g	Lmin	增长 100mm	Lmin	增长 100mm	
SWC180DH1	180	12.5	6.3	≤15	75	650	155	105	114	110	8-17	17	5	-	-	0.165	0.0070	58	28	
SWC180DH2					55	600										0.162		56		
SWC180DH3					40	550										0.160		52		
SWC225DH1	225	40	20	≤15	85	710	196	135	152	120	8-17	20	5	32	9.0	0.415	0.0234	95	4.9	
SWC225DH2					70	640										0.397		92		
SWC250DH1	250	63	31.5	≤15	100	795	218	150	168	140	8-19	25	6	40	12.5	0.900	0.0277	148	5.3	
SWC250DH2					70	735										0.885		136		
SWC285DH1	285	90	45	≤15	120	950	245	170	194	160	8-21	27	7	40	15.0	1.826	0.0510	229	6.3	
SWC285DH2					80	880										1.801		221		
SWC315DH1	315	125	63	≤15	130	1070	280	185	219	180	10-23	32	8	40	15.0	3.331	0.0795	346	8.0	
SWC315DH2					90	980										3.163		334		
SWC350DH1	350	180	90	≤15	140	1170	310	210	267	194	10-23	35	8	50	16.0	6.215	0.2219	508	15.0	
SWC350DH2					90	1070										5.824		485		
SWC390DH1	390	250	125	≤15	150	1300	345	235	267	215	10-25	40	8	70	18.0	11.125	0.2219	655	15.0	
SWC390DH2					90	1200										10.763		600		

◆注：1.Tf-在变负荷下按疲劳强度所允许的转矩。2.Lmin-缩短后的最小长度。3.L-安装长度，按需要确定