


SWC CH 型（长伸缩焊接型）整体叉头十字轴式 万向联轴器（JB/T 5513-1991）

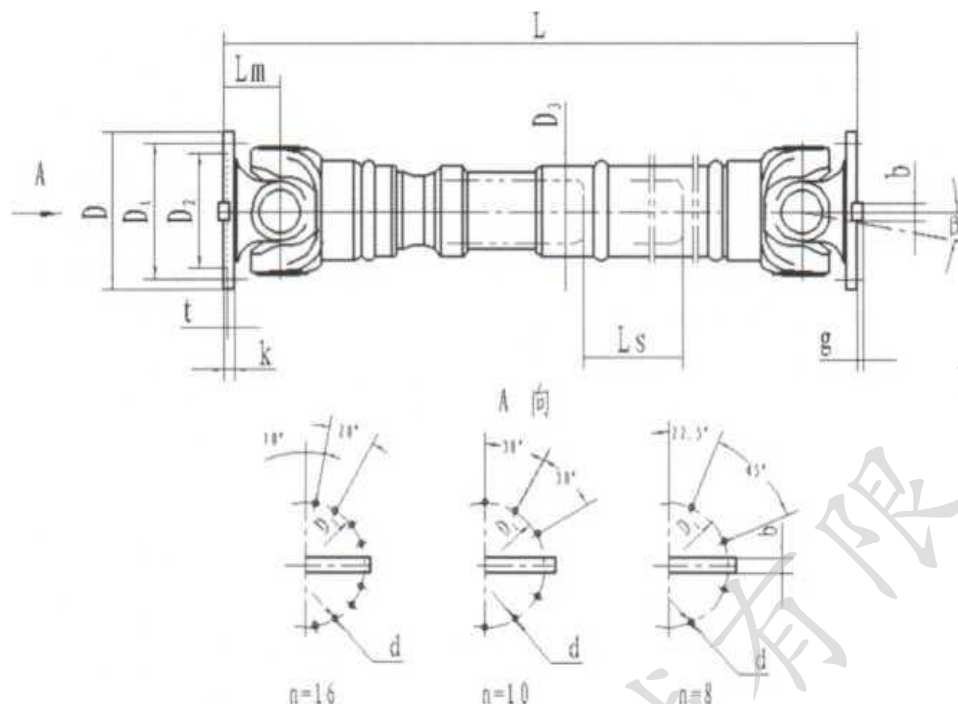

型号	回转 直径 D mm	额定转 矩 Tn kN•m	疲劳 转矩 Tf kN•m	轴线 折角 E (°)	伸缩 量 Ls (mm)	尺 寸 (mm)										转动惯量 (kg•m ²)		质量 (kg)	
						Lmin	D1js11	D2 H7	D3	Lm	n-d	k	t	b h9	g	Lmin	增长 100mm	Lmin	增长 100mm
SWC180CH1	180	12.5	6.3	≤15	200	925	155	105	114	110	8-17	17	5			0.181	0.0070	74	28
SWC180CH2					700	1425										0.216		104	
SWC225CH1	225	40	20	≤15	220	1020	196	135	152	120	8-17	20	5	32	9	0.561	0.0234	132	4.9
SWC225CH2					700	1500										0.674		182	
SWC250CH1	250	63	31.5	≤15	300	1215	218	150	168	140	8-19	25	6	40	125	1.016	0.277	190	
SWC250CH2					700	1615										1.127		235	
SWC285CH1	285	90	45	≤15	400	1475	245	170	194	160	8-21	27	7	40	15	2.156	0.0510	300	6.3
SWC285CH2					800	1875										2.360		358	
SWC315CH1	315	125	63	≤15	400	1600	280	185	219	180	10-23	32	8	40	15	3.812	0.0795	434	8.0
SWC315CH2					800	2000										4.150		514	
SWC350CH1	350	180	90	≤15	400	1715	310	210	267	194	10-23	35	8	50	16	7.663	0.2219	672	15.0
SWC350CH2					800	2115										8.551		823	
SWC390CH1	390	250	125	≤15	400	1845		235	267	215	10-25	40	8	70	18	12.730	0.2219	817	15.0
SWC390CH2					800	2245										13.617		964	
SWC440CH1	4K)	355	190	≤15	400	2110		255	325	260	16-28	42	10	80		22.540	0.4744	1312	21.7
SWC440CH2					800	2510										24.430		1537	
SWC490CH1	490	500	250	≤15	400	2220	435	275	325	270	16-31	47	12	90	22.5	33.970	0.4744	1554	21.7
SWC490CH2					800	2620										35.870		1779	
SWC550CH1	550	710	355	≤15	500	2585	492	320	426	305	16-31	50	12	100	22.5	72.790	1.3570	2585	34
SWC550CH2					1000	3085										79.570		3045	

◆注：1.T_f-在变负荷下按疲劳强度所允许的转矩。2.L_{min}-缩短后的最小长度。3.L-安装长度，按需要确定