


Z1型胀套

Z1 type locking assemblies

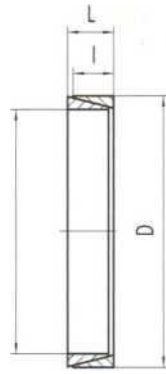

基本尺寸和参数 Basic dimensions and parameters of the locking assemblies, type Z1

规格 sizes	基本尺寸 Basic dimensions				当 Pt=100N/mm ² 时的额定负荷 rated loading when Pt=100N/mm ²		G (kg)
	d	D	L	I	Ft KN	Mt KN.m	
d×D	mm						
8×11	8	11	4.5	3.7	1.2	0.005	0.001
9×12	9	12	4.5	3.7	1.3	0.006	0.001
10×13	10	13	4.5	3.7	1.5	0.007	0.002
11×14	11	14	4.5	3.7	1.6	0.008	0.002
12×15	12	15	4.5	3.7	2.0	0.012	0.002
13×16	13	16	4.5	3.7	2.4	0.016	0.002
14×18	14	18	6.3	5.3	2.8	0.020	0.004
15×19	15	19	6.3	5.3	3.0	0.022	0.004
16×20	16	20	6.3	5.3	3.2	0.025	0.005
17×21	17	21	6.3	5.3	3.3	0.028	0.005
18×22	18	22	6.3	5.3	3.6	0.032	0.005
19×24	19	24	6.3	5.3	3.8	0.036	0.007
20×25	20	25	6.3	5.3	4.0	0.040	0.007
22×26	22	26	6.3	5.3	4.5	0.050	0.007
24×28	24	28	6.3	5.3	4.8	0.055	0.007
25×30	25	30	6.3	5.3	5.0	0.060	0.009
28×32	28	32	6.3	5.3	5.6	0.080	0.009
30×35	30	35	6.3	5.3	6.0	0.090	0.01
32×36	32	36	6.3	5.3	6.4	0.10	0.01
35×40	35	40	7.0	6.0	8.5	0.15	0.02
36×42	36	42	7.0	6.0	9.0	0.16	0.02
38×44	38	44	7.0	6.0	9.4	0.18	0.02
40×45	40	45	8.0	6.6	10.0	0.20	0.02
42×48	42	48	8.0	6.6	10.5	0.22	0.03
45×52	45	52	10.0	8.6	14.6	0.33	0.04
48×55	48	55	10.0	8.6	15.4	0.37	0.05
50×57	50	57	10.0	8.6	16.2	0.40	0.05
55×62	55	62	10.0	8.6	17.8	0.49	0.05
56×64	56	64	12.0	10.4	21.7	0.61	0.06
60×68	60	68	12.0	10.4	23.5	0.70	0.07
65×73	65	73	12.0	10.4	25.6	0.83	0.08

规格 sizes×D	基本尺寸 Basic dimensions				当 Pt=100N/mm ² 时的额定负荷 raed loading when Pf=100N/mm ²		G (kg)
	d	D	L	I	Ft KN	MtKM. m	
	mm						
70×79	70	79	14.0	12.2	32.0	1.12	0.11
75×84	75	84	14.0	12.2	34.4	1.29	0.12
80×91	80	91	17.0	15.0	45.0	1.81	0.19
85×96	85	96	17.0	15.0	48.0	2.04	0.20
90×101	90	101	17.0	15.0	51.0	2.29	0.22
95×106	95	106	17.0	15.0	54.0	2.55	0.23
100×114	100	114	21.0	18.7	70.0	3.50	0.38
105×119	105	119	21.0	18.7	73.2	3.82	0.40
110×124	110	124	21.0	18.7	77.0	4.25	0.41
120×134	120	134	21.0	18.7	84.0	5.05	0.45
125×139	125	139	21.0	18.7	92.0	5.75	0.62
130×148	130	148	28.0	25.3	124.0	8.05	0.85
140×158	140	158	28.0	25.3	134.0	9.35	0.91
150×168	150	168	28.0	25.3	143.0	10.70	0.97
160×178	160	178	28.0	25.3	152.5	12.20	1.02
170×191	170	191	33.0	30.0	192.0	16.30	1.50
180×201	180	201	33.0	30.0	204.0	18.30	1.58
190×211	190	211	33.0	30.0	214.0	20.40	1.68
200×224	200	224	38.0	34.8	262.0	26.20	2.32
210×234	210	234	38.0	34.8	275.0	28.90	2.45
220×244	220	244	38.0	34.8	288.0	37.70	2.49
240×267	240	267	42.0	39.5	358.0	43.00	3.52
250×280	250	280	48.0	44.0	415.0	52.00	4.68
260×290	260	290	48.0	44.0	435.0	56.50	4.82
280×313	280	313	53.0	49.0	520.0	72.50	6.27
300×333	300	333	53.0	49.0	555.0	83.00	6.47
320×360	320	360	65.0	59.0	710.0	114.00	10.90
340×380	340	380	65.0	59.0	755.0	128.50	11.50
360×400	360	400	65.0	59.0	800.0	144.00	12.20
380×420	380	420	65.0	59.0	845.0	160.50	12.80
400×440	400	440	65.0	59.0	890.0	178.00	13.50
420×460	420	460	65.0	59.0	935.0	196.00	14.10
450×490	450	490	65.0	59.0	998.0	224.50	15.20
480×520	480	520	65.0	59.0	1070.0	256.00	16.00
500×540	500	540	65.0	59.0	1110.0	278.00	16.50

注：Pf 为胀紧联结套与轴结合面上的压力。